



# EVERY POWER.

# QSX15

## QSX15 Ratings

ENGINE MODEL	ADVERTISED HORSEPOWER	PEAK TORQUE	ASPIRATION
QSX15 *	630 HP @ 2100 RPM	1875 LB-FT @ 1400 RPM	Turbocharged / Charge Air Cooler
QSX15	535 HP @ 2100 RPM	1873 LB-FT @ 1400 RPM	Turbocharged / Charge Air Cooler
QSX15	450 HP @ 2100 RPM	1550 LB-FT @ 1400 RPM	Turbocharged / Charge Air Cooler
QSX15	375 HP @ 2200 RPM	1346 LB-FT @ 1400 RPM	Turbocharged / Charge Air Cooler



\* RESTRICTED RATING  
ADDITIONAL RATINGS ARE AVAILABLE. CHECK WITH YOUR CUMMINS DISTRIBUTOR.

Emission Certification: U.S. EPA Tier 3, CARB Tier 3, EU Stage IIIA



QSX15

FR-10595

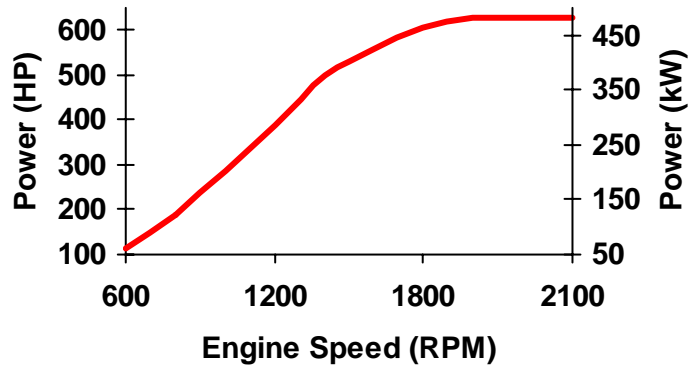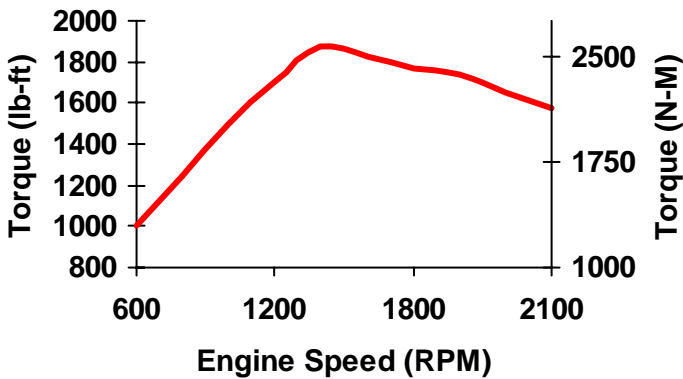

## Specifications

Advertised Horsepower		375 - 630 BHP	280 - 470 kW	
Peak Torque		1346 - 1875 LB-FT	1825 - 2542 NM	
Number of Cylinders		6		
Displacement		915 cu in	15.0 liters	
Bore and Stroke		5.39 in. x 6.65 in.	137 mm x 169 mm	
Aspiration		Turbocharged and Charge Air Cooled		
Oil System Capacity		48 U.S. Quarts	45.41 liters	
Power Unit Weight (Dry)	Open	5676 lbs.	2575 Kg	
	Enclosed	6184 lbs.	2805 Kg	
Total Cooling System Capacity		98 U.S. Quarts	90.82 liters	
Power Unit Size: Open	Length	106.25 in.	2699 mm	
		Width	62.75 in.	1594 mm
		Height	84.05 in.	2134 mm
	Enclosed	Length	106.25 in.	2699 mm
		Width	62.75 in.	1594 mm
		Height	94.29 in.	2395 mm

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in Hg (100 kPa) barometric pressure [300ft (91m) altitude] 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1kPa) water vapor pressure with No. 2 diesel fuel.

All data is based on the engine operating with fuel system, water pump, and 15 in H<sub>2</sub>O (3.733 kPa) inlet air restriction with 6 in (152 mm) inner diameter, and with 2 in Hg (7 kPa) exhaust restriction with 5 in (127 mm) inner diameter; not included are alternator, fan, optional equipment and driven components.

The engine may be operated up to 5,000 ft (1,524 m) altitude before electronic derate is applied.

**CUMMINS POWER PRODUCTS**

# KEY FEATURES

# QSX15

**Patented Wastegated Turbo** Maximizes performance at every RPM.

**Full-Authority Electronic Controls** Optimized engine operation, diagnostics, prognostics and more. Industry standard datalinks.

**Parent Bore Cylinder Block** Structurally advanced design handles high pressures with greater durability.

**Quiet operation** makes the QSX Series engine suitable in many environments.

**Air Cleaner** Heavy duty industrial air cleaners with aluminized tubing. Safety elements included within the air cleaners and restriction indicators available.

**Baserail Mounting** Made of heavy duty formed C channel. All metal components are powder coated. Passes a 1000 hours salt water test.

**Cooling System** Heavy duty radiator assembly with jacket water and charge air cooler incorporated within assembly. Sucker or blower fan arrangements available. Aluminized charge air cooler tubes and painted water tubes. Radiator shroud, fan and belt guarding included. Radiator is isolated.

**Instrument Panel** Operates on 12 or 24 volt using the Murphy Powerview Module. J1939 communication with a 9 pin diagnostic connection. Shutdown protection provided through the ECM. Isolated inner panel within an outer protective lockable box. Available on right or left hand side of unit. Nema panels also available.

**Clutches** Over center clutches available depending on application. Provided primarily by Twin Disc.

**Enclosure** Fully enclosed power unit available. Enclosure housings use 12-gauge steel. All components are powder-coated, which increases chip resistance. Passes a 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Removable side doors for easy engine serviceability.

**Exhaust** Heavy duty industrial muffler provided.

**Cummins Industrial Warranty** Coverage for two years or 2000 hours of operation, whichever occurs first, from the date of delivery of the power unit to the first user, or from the date the unit is first leased, rented or loaned, or when the power unit has been operated for 50 hours, whichever comes first. If the 2000 hour limit is exceeded during the first year, coverage continues until the end of the first year.

## CUMMINS POWER PRODUCTS

21810 Clessie Court  
New Hudson, Michigan 48165  
Phone: 248-573-1600  
Fax: 248-573-4014  
Internet: [cpp.cummins.com](http://cpp.cummins.com)

Available Options	Standard	Optional
Air Cleaner 25 g/cfm w/ Safety Element - Open Rear Mount	■	
Air Cleaner 25 g/cfm w/ Safety Element - Enclosed Top Mount		■
Clutch Support Plate		■
Tw in Disc Clutch		■
Decal Option / Parts Manual	■	
Engine Harness Option	■	
Linear Throttle Control		■
Full Enclosure		■
Electrical Wiring 12 Volt		■
Electrical Wiring 24 Volt	■	
Instrument Panel Mount - Open	■	
Instrument Panel - Powerview ; Includes Murphy Powerview w/ oil pressure, water temp., voltmeter, and tachometer gauges, key switch, run/idle switch, 9 pin J1939 diagnostic port, and isolated panel within enclosed lockable box.	■	
Instrument Panel - Nema Enclosure		■
12 Foot Extension Harness		■
24 Foot Extension Harness		■
Baserail Engine Sub Base Non-Isolated	■	
Baserail Engine Sub Base - Extended for Clutch Support		■
Packing / Shipping Skid	■	
Cooling System - Sucker; Includes Radiator, fan, shroud, positive deaeration tank, guarding, tubes.	■	
Cooling System - Blower; Includes radiator, fan, shroud, positive deaeration tank, guarding, tubes.		■
Cooling System with Saltwater Resistant Radiator.		■
Fuel Cooler Added to Cooling System		■
Restriction Indicator - Air Cleaner		■
Stone Guard - Grill Type	■	
Coolant Level Safety Shutdown	■	
Exhaust System	■	